


IPLED Modules

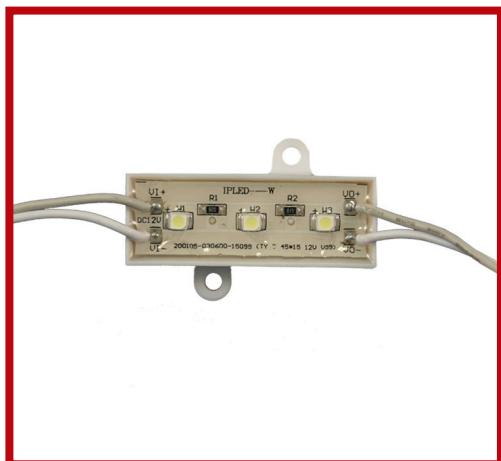

This series adopts the high-stability chips as the light sources from the internationally famous factories Lumileds, Cree etc, is of perfect quality with competitive prices, very stable, with large viewing angle, slow light-weakening and free maintenance, is widely used in channel letters, signs, light boxes, landscapes and stage decorations etc.

LED Color	LED Qty	Module interface	Cluster Qty	Weight	LED type	Dimension	Interface definition	Space between	Lifespan
Red	3PCS	Gray 0.5mm2 x50mm RVleads	20 PCS	2.6g±5%	SMD	48x18x10 mm	Gray anode, white cathode	50mm	MTBF> 50.000 hours
Yellow									
Green									
Blue									
White									

Working temperature	Defend Grade	Working input voltage	Max power	Diving mode	Luminous Flux	Beam angle
-40°C ~ 60°C	IP67 completely satisfied the outdoor lighting standard	D12V±5%	0.27W	Invariablenes voltage! (Insure every LED working under the invariablenes voltage)	9lm 4.5lm 4,5lm 4,5lm 10,5lm	>120°

